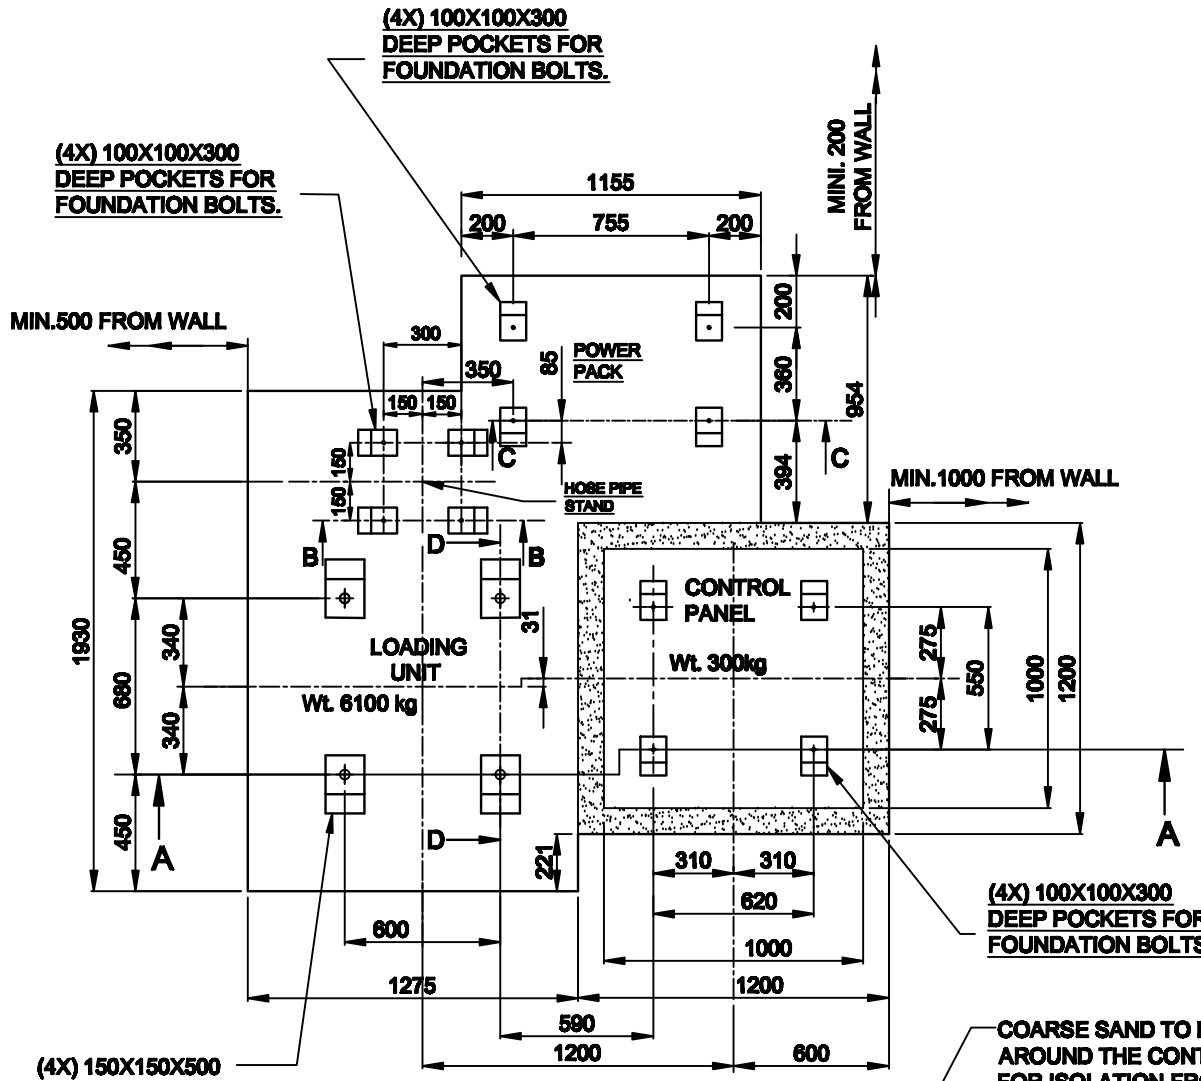

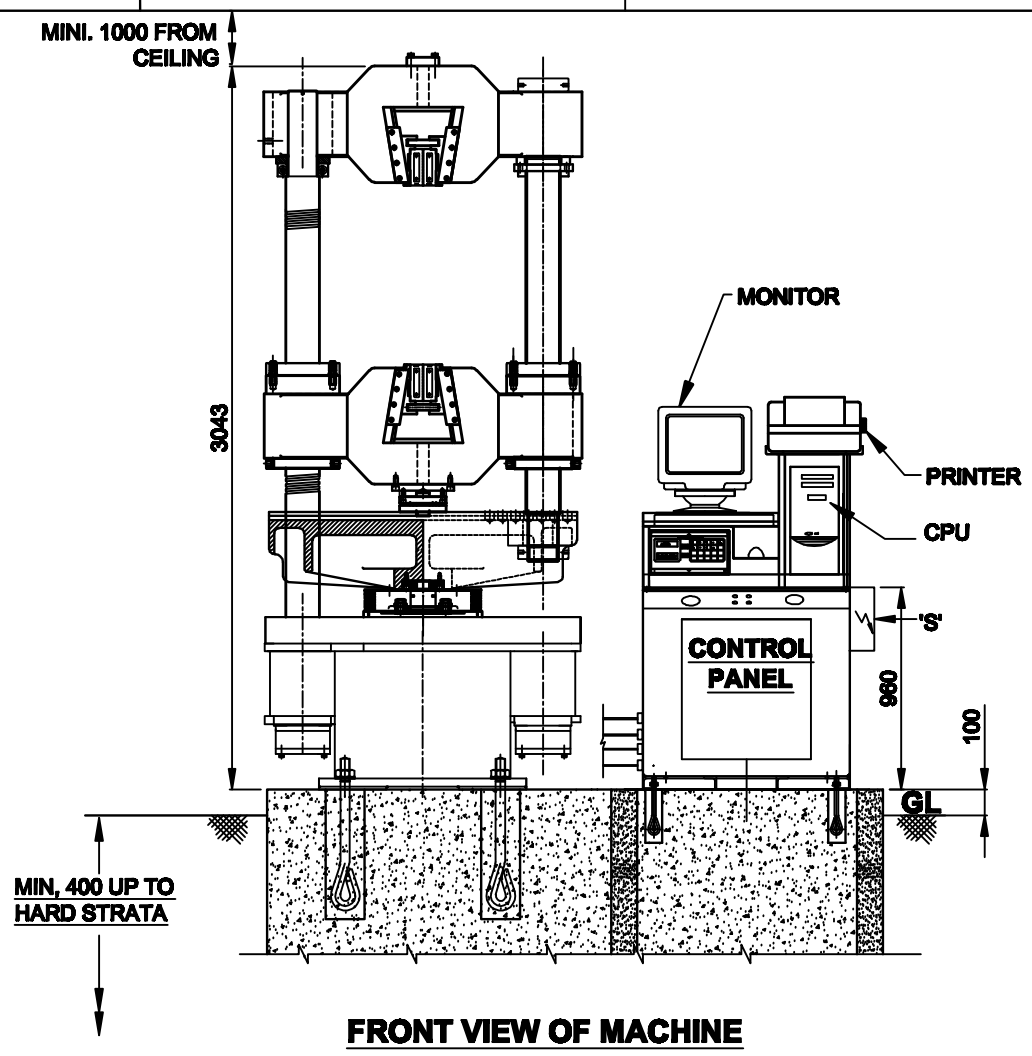

FRONT VIEW OF MACHINE

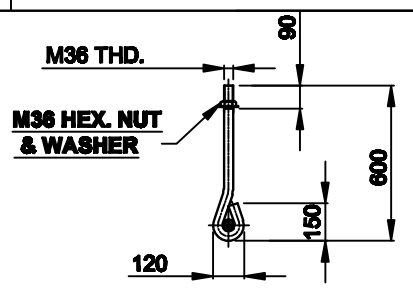

(4X) FOUNDATION BOLTS
AS PER IS 5624

FOR LOADING UNIT

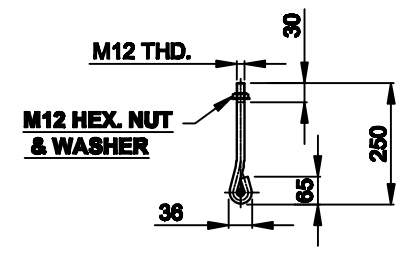

(12X) FOUNDATION BOLTS
AS PER IS 5624

FOR CONTROL PANEL 4 NOS,

FOR POWER PACK 4 NOS.

FOR HOSE PIPE STAND 4 NOS.

COARSE SAND TO BE FILLED ALL
AROUND THE CONTROL PANEL
FOR ISOLATION FROM VIBRATION.

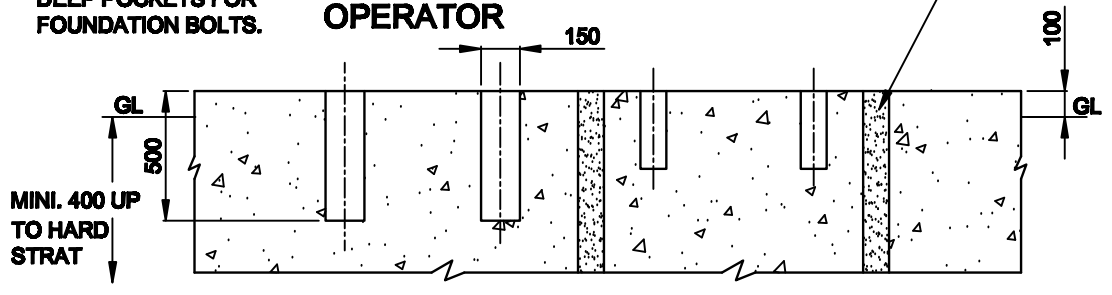

SECTION 'A-A'

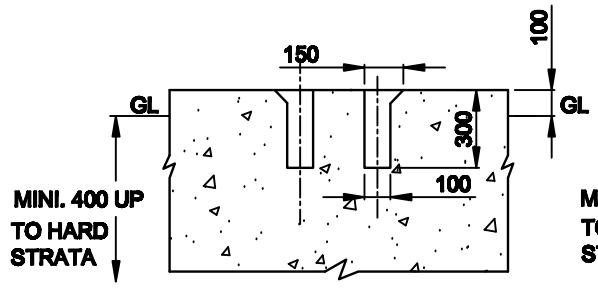

SECTION 'B-B'

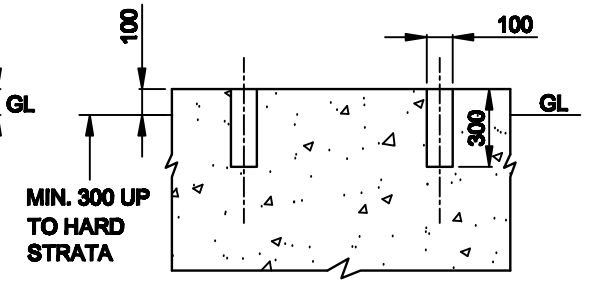

SECTION 'C-C'

NOTES-

'S' ELECTRIC SUPPLY POINT LOCATION

3 Ph, 440V, 50 Hz, A.C.

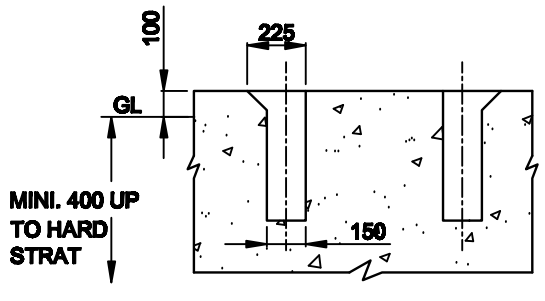

SECTION 'D-D'

ALL DIMENSIONS ARE IN mm. DO NOT SCALE

DESCRIPTION	DATE	DRN.	CHK.	L.F.	REV.
POWER PACK FOUNDATION HOLES SHEFTED FROM 535 TO 450	1-3-11	AMP	YVK		A

RECORD OF DRAWING CHANGES

PART No.-	
MATL.-	
QTY.-	
FIN.Wt. -	
RAW. Wt. -	
SURFACE TREATMENT	

	DRG	DATE	BY
	DRN.	09-10-10	AMP
	CHK.	09-10-10	YVK
	APPD.		
	A2		

FINE SPAVY ASSO. & ENGRS.
PVT. LTD., C-45/2, M.I.D.C. MIRAJ

TITLE - FOUNDATION PLAN

MODEL	TUE-C-1200
DRG.No.	TUE-C-1200-FP-01A